



TC-C34QN Spec:15W/WIFI/Eu/4mm/V4.0

Bullet Camera

Wi-Fi Series



KEY FEATURES

- Metal+Plastic Housing
- Up to 2560x1440@20fps
- S+265/H.265/H.264
- Smart IR, IR Range: 50m
- Built-in Mic & Speaker
- Operating Conditions -30°~60°, 0~95% RH
- IP67



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com
Website: en.tiandy.com


Tel: +86-22-58596065
Fax: +86-22-58596048

SPECIFICATIONS

Camera	
Image Sensor	1/2.8" CMOS
Min. Illumination	Color:0.02Lux@(F1.6,AGC ON),B/W:0Lux with IR
Shutter Time	1s~1/100000s
Day&Night	IR-cut filter with auto switch (ICR)
WDR	DWDR
S/N	>40dB
Angle Adjustment	0~360°(P);0~75°(T);0~360°(R)
Lens	
Lens Type	Fixed
Focal Length	4mm
Lens Mount	M12
Aperture Range	F1.6, fixed focal lens
Field of View	86;45.2;99.1
DORI Distance	Detect:65.31m Observe:25.92m Recognize:13.06m Identify:6.53m
Illuminator	
IR LEDs	2
IR Distance	50m
Wavelength	850nm
White LEDs	2
Whitelight Distance	15m
Compression Standard	
Video Compression	S+265/H.265/H.264B/H.264M/H.264H
Video Bit Rate	32k~4Mbps
Audio Compression	G.711A/G.711U
Audio Sampling Rate	8kHz/16kHz
Image	
Max. Resolution	2560x1440@20fps
Main Stream	PAL: 20fps(2560x1440, 2304x1296,1920x1080,1280x720,640x480,704x576) NTSC: 20fps(2560x1440,2304x1296,1920x1080,1280x720,640x480,704x480)
Sub Stream	PAL:20fps(704x576,704x288,640x360,352x288) NTSC:20fps(704x480,704x240,640x360,352x240)
Third Stream	N/A
BLC	Yes
HLC	Yes
AGC	Yes
3D DNR	Yes
White Balance	Auto/Semi-Auto/Manual/Sunshine/Nature Light/Warmlight Lamp/ Daylight Lamp/Filament Lamp/Lock White Balance
ROI	N/A
Corridor mode	N/A

EIS	N/A
OSD	Overlay of additional characters in one area, 1 line, up to 48 characters or 16 Chinese characters;16*16/32*32/48*48/64*64
Picture Overlay	N/A
Privacy Mask	4 black static areas
Defog	Yes
Feature	
Alarm Trigger	Voltage Alarm;Disk Full;Disk R/W Error;IP Address Conflict
Video Analytics	N/A
Rules of behavior analyse in 1 scene	N/A
Early Warning(EW)	N/A
Auto-Tracking	N/A
Face Mode	N/A
Face Detection Performance	N/A
Linkage Method	trigger sound;trigger recording;trigger capture;notify surveillance center
Network	
ANR	Yes
Protocols	HTTP;TCP/IP;UDP;ICMP;DHCP;DNS;NTP;IPv4;SSH;Unicast;FTP
System Compatibility	P2P;onvif;CGI
Remote Connection	≤2
Client	Easy7 Smart Client
Moblie Client	EasyLive Plus
Web	IE10+;Firefox52+;Edge89+;Safari11+;Chrome57+
Interface	
Communication Interface	1*RJ-45,10/100 Mbps self-adaptive Ethernet port
Audio I/O	N/A
Alarm I/O	N/A
Built-In Mic	Yes
Built-In Speaker	Yes
Reset Button	Yes
On-board storage	Support microSD/microSDHC/microSDXC card, up to 512 GB
Additional interfaces	N/A
General	
Web Client Language	3languages Simple Chinese/English/Vietnamese
Operating Temperature	-30°C~60°C(No turning on the light)
Operating Humidity	Humidity 95% or less (no condensation)
Storage Temperature	-30°C~60°C
Storage Humidity	Humidity 95% or less (no condensation)
Power Supply	DC12V±25%
Protection	Surge2000V;ESD6000V;IP67
Boundary Dimensions	164(L)66(W)73(H)mm
Package Dimensions	215(L)95(W)120(H)mm
GrossWeight	0.46kg
NetWeight	0.26kg

DIMENSIONS (Unit: mm)

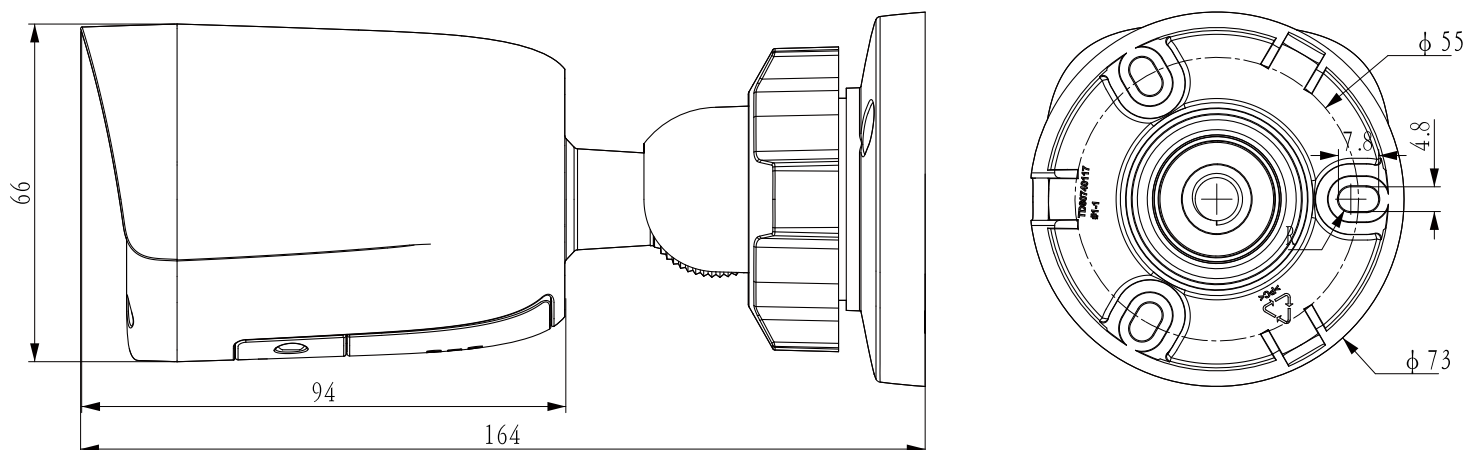

ACCESSORIES



TC-P54BM Spec:V5



A36



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com
Website: en.tiandy.com

Tel: +86-22-58596065
Fax: +86-22-58596048